

Recess
mounted



Indoor/
outdoor





CRG-SS 35



CRG-AL 35



CRG-BR 35

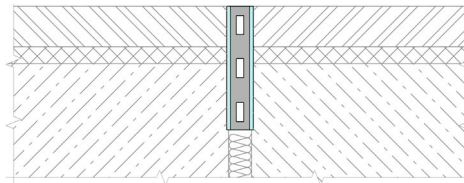

Profile	A ¹ , mm	B ² , mm	H ³ , mm	M _x , mm
CRG 35/9/10	7	9	10	2(+/-1)
CRG 35/9/20	7	9	13	2(+/-1)
CRG 35/9/30	7	9	15	2(+/-1)
CRG 35/9/40	7	9	18	2(+/-1)
CRG 35/9/50	7	9	20	2(+/-1)
CRG 35/9/60	7	9	22	2(+/-1)
CRG 35/9/70	7	9	25	2(+/-1)
CRG 35/9/80	7	9	30	2(+/-1)
CRG 35/9/90	7	9	35	2(+/-1)
CRG 35/9/100	7	9	40	4 (+2/-2)

¹The standard thickness of the gasket insert is specified.


The following thicknesses are also available: - 4, 8, 12 mm.

² Visible width with 1 mm thickness of the guide brackets is indicated.

The following thick-nesses are available: - 1.5, 2 mm.

³The profile can be manufactured to any required height.

► LABELING

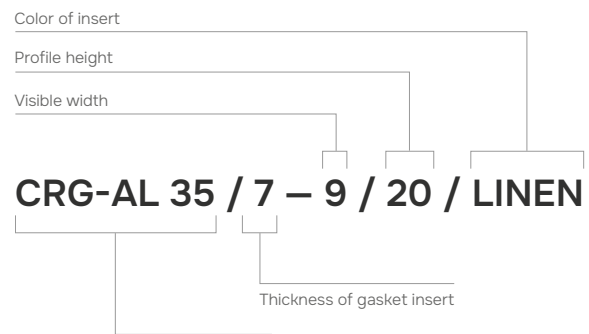

CRG-AL 35 / 7 – 9 / 20 / LINEN

Profile Series:
CRG-AL 35 – aluminium version;
CRG-SS304/316 35 – stainless steel version (with the steel grade);
CRG-BR 35 – brass version.

► TECHNICAL DATA

Material of guide ¹	AISI 304 (1.4301)	AISI 316 (1.4401)	Aluminum (6063 or 5754)	Brass	
Designation	CRG-SS304	CRG-SS316	CRG-AL	CRG-BR	
Strength, MPa	$\sigma_b=515$	$\sigma_b=505$	$\sigma_b=265$	$\sigma_b=330$	
Tooling	Mounting holes				
Standard length	2.44 – standard (2.50 or 3.00 meters—on request)				
Material of insert	Neoprene				
Strength, N/mm	$\sigma_b=10$				
Shore A	55				
Elongation to break	>600				
Resistance	acid,chemical and UV: excellent				
Color of insert	charcoal	pewter	light grey	earth	light smoke
	sandstone	alabaster	light beige	linen	milky white

► EXTRAS

Additionally, the profile can be supplied with special anchors for installation.

